

Comparative efficiency of technologies for conversion and transportation of energy resources of Russia's eastern regions to NEA countries

A.M. Kler, E.A. Tyurina, O.V. Skripchenko

Abstract - The paper presents perspective technologies for combined conversion of fossil fuels into synthetic liquid fuels and electricity. The comparative efficiency of various process flows of conversion and transportation of energy resources of Russia's east that are aimed at supplying electricity to remote consumers is presented. These also include process flows based on production of synthetic liquid fuel.

Index Terms - combined conversion of fossil fuels, synthetic liquid fuels, process flows of conversion and transportation of energy carriers.

I. INTRODUCTION

There are considerable energy resources in the eastern regions of Russia, which make it possible both to meet domestic demand for energy carriers and to export them. However, the distances between regions that possess energy resources and potential consumption regions, first of all, in NEA countries, are great, which affects greatly the value of transportation costs. Therefore, the estimation of efficiency of long-distance transportation variants is getting topical. Since the share of gaseous and solid fuel in the energy balances is increasing the study on process flows of long-distance transportation of natural gas and coal energy, which include combination of technologies for conversion and transportation is of special interest.

Analysis of known technologies for conversion and transportation of energy carriers allows one to make the conclusion that the process flows including coal and gas conversion into synthetic liquid fuels (SLF) will be efficient for

A.M. Kler, E.A. Tyurina, O.V. Skripchenko are with Melentiev Energy Systems Institute, Siberian Branch of Russian Academy of Sciences, Irkutsk, Russia (e-mail: tyurina@isem.sei.irk.ru). This investigation is executed at financial support of NO "Fund "Global Energy"", the grant MG-2009/04/1.

transmission of energy produced from gaseous and solid fuels at long distances. The benefit here will be achieved owing to the costs of liquid fuel transportation that are much lower than the costs of gaseous and solid fuel transportation. Besides, the costs of liquid fuel for consumers, first of all, power plants are much lower than those of coal consumers. At the same time, the process of SLF production is quite expensive. Therefore, it is necessary to estimate at what distance of transportation the additional SLF production costs will be recovered by saving the transportation costs.

The paper aims to compare the process flows based on technologies for SLF production and conventional technologies for energy transportation (pipeline transportation of natural gas, railway transportation of coal, electricity transportation over DC transmission lines). There are grounds to believe that at a large-scale long-distance transportation of coal, natural gas or SLF their marginal consumers will be power plants. Therefore it is sensible to assume electricity price for remote consumers, to be determined on the basis of value of internal rate of return, equal for all variants, as a criterion of process flow efficiency.

II. THE PLANTS FOR CO-PRODUCTION OF SYN-FUELS AND ELECTRICITY

Among technologies for large-scale production of various SLFs the most promising is the technology for production of methanol from synthesis gas which is in turn produced from coal or natural gas. This relates to the fact that methanol production is a well known hetero-catalytic process: sufficiently selective, highly productive and continuous. Methanol is suitable for transportation and storage. The world's total methanol production capacity accounts for about 35 million t yearly.

It should be noted that methanol production is accompanied by release of a considerable

amount of heat and formation of combustible blowdown gases. An efficient method for utilization of this “energy waste” is co-production of methanol and electricity at an integrated plant. These plants for co-production of synfuels and electricity are considered in this paper. Electricity produced by the plants is considered to be consumed in the area close to the plant. The price of this electricity is specified in the economic calculations.

The plants for co-production of synfuel and electricity are characterized by highly complicated flow charts and various physical and chemical processes that occur in their components. Besides, there is virtually no experience in their design. The research on the plants consists mainly of mathematical modeling and technical and economic studies on the models.

The works on mathematical modeling of the plants intended for synthesis of SLF and their technical and economic studies have been performed by the Energy Systems Institute of RAS for a long time [1-4]. Mathematical model of certain blocks of the plants on coal and natural gas, as well as the models of the whole plants were constructed. The studies made it possible to find optimal schemes and parameters, and identify the conditions for the plants to become economically efficient.

Fig.1 shows as an example the calculated scheme of the plant for coal-based co-production of methanol and electricity. Conventionally the plant is represented by three blocks: block of synthesis gas production, block of catalytic synthesis of methanol and energy block.

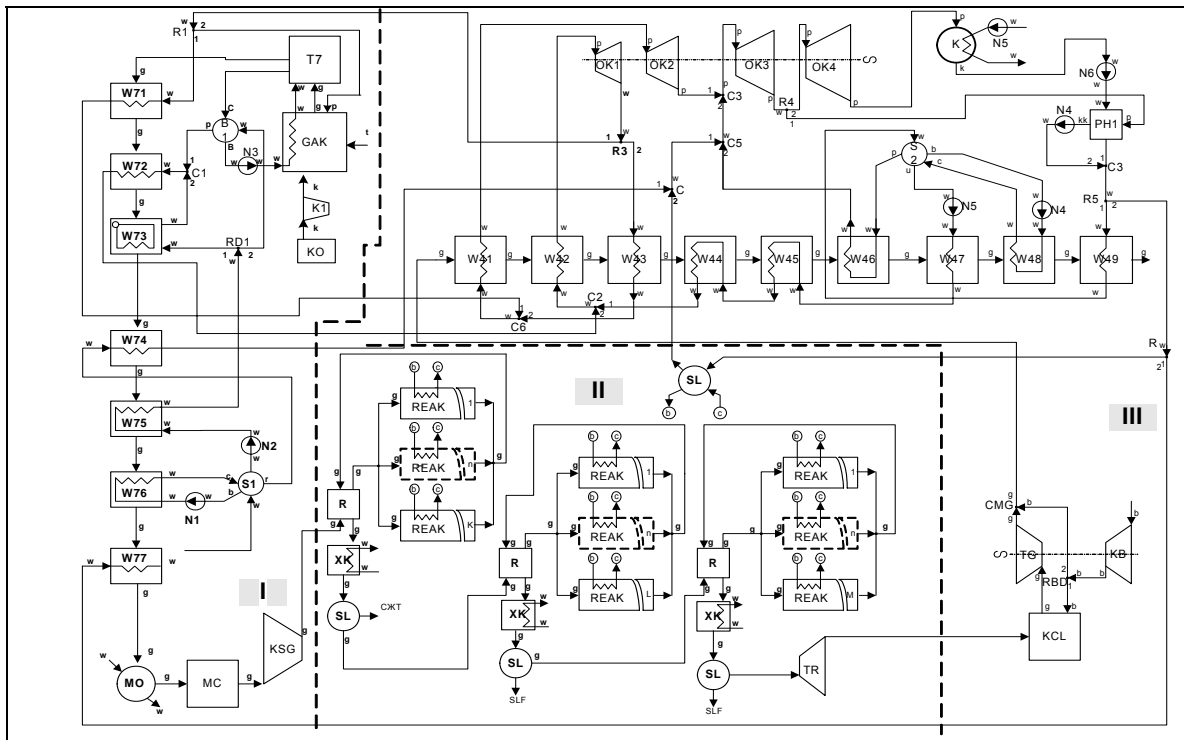


Fig.1. Calculated scheme of a plant for coal-based methanol production: T7 – radiation heat exchanger on gasification products, GAK – gas generator, KO – block for oxygen production, K1 – oxygen compressor, W71-W77 – convective heat exchanger on gasification products, B1, S1, S2, S3 – separator drum, C, C1-C6 – mixer of water or steam flows, R, R1-R5 – separator of water or steam flow, N1-N6 – pump, RD1 – fractional separator of water or steam, Y1, Y2 – dry ash collector, MO – wet scrubber, MC – CO₂ removal system, KSG – synthesis gas compressor, R – regenerative gas-gas heat exchanger, SL – separator, XK – condenser, REAK – adiabatic zone of SLF synthesis reactor, TP – expansion gas turbine, KCL – combustion chamber of gas turbine, TG – main gas turbine, KB – air compressor, RBD – air stream separator, CMG – mixer of gas and air streams, OK1-OK4 – steam turbine compartments, W41-W49 – convective gas-water heat exchangers of waste-heat boiler, K – steam turbine condenser, PH1 – low pressure regenerative heater. Notation of flows: t-coal, k-oxygen, p-steam, w-water, steam, steam-water mixture, cooling water, g- conversion products, synthesis gas, blowdown gas, combustion products, b-air, kk-condensate, u, b, c- water supplied to circulating pump, 1, 2 – bifurcation, mixing of flows. I – block of synthesis gas production, II – block of methanol synthesis, III – energy block.

In block I solid fuel is gasified and the mixture of hydrogen and carbon monoxide (synthesis gas) is produced. Besides, in this block synthesis gas is cooled in the system of gas generator heat exchangers and cleaned from ash and sulfur compounds, and CO₂. Heat released in gas cooling is used for generation of steam that goes to steam turbine of energy block to produce electricity. In block II the catalytic synthesis of methanol is performed. This process is accompanied by generation of low pressure steam in intermediate heat exchangers of synthesis reactors that are intended for extraction of reaction heat. This steam goes to the low pressure section of the steam turbine. Blowdown gas goes from the block of synthesis to combustion chamber of gas turbine. The combustion products from the chamber are then used to generate electricity in gas turbines. In waste-heat boiler the steam of high and low pressure is generated. This steam goes to steam turbine for electricity generation.

It should be noted that the flow chart of the plant was developed on the basis of the most promising technologies of the processes that are employed in the plant. Fuel gasification takes place in gas generators with fluidized bed and dry slag removal, where steam-oxygen blast under the pressure of 2 MPa is used. This gas generator is an analogue of rather well studied and commercially implemented gas generator Winkler. Gas generators of the kind are most often applied in the plants for synthesis of SLF. The optimal flow chart of methanol synthesis with direct- flow reactors of synthesis and intermediate cooling of synthesis products in heat exchangers by boiling water was chosen based on the preliminary studies of various technologies: with isothermal reactors, with preliminarily switched synthesis reactor, with cooling of synthesis products by fresh synthesis gas, etc. The steam and gas combined cycle, being the most promising for energy plants, is suggested for energy block.

The flow chart of the plant for co-production of methanol and electricity (PCME) on the basis of natural gas is similar to that presented above, except for the block for natural gas conversion, in which natural gas converter is used instead of gas generator on coal to produce synthesis gas.

Studies of the PCME aim to determine optimal parameters of the plants and change of their technical and economic performance depending on operation conditions (prices of fuel, equipment and products). The studies take into consideration the most important factor that influences the cost of all blocks of the plant and its energy efficiency, i.e. relationship between production of synthetic liquid fuel and electricity. The major parameters that determine this relationship include composition of blast supplied to gas generators on coal or natural gas converters, the number of reactors at synthesis stages, etc. These parameters were among the variables to be optimized in the study of the plant. Optimization of the plant included solving the problems of nonlinear mathematical programming which implies finding the plant parameters (composition of blast supplied to gas generators, catalyst volumes in reactors of synthesis, temperatures and pressures of working media of the combined cycle plant, etc.) that provide minimum value of the SLF price at set levels of internal rate of return (IRR) and prices of fuel consumed and electricity supplied, in terms of physical and technical constraints on the plant parameters.

Table 1 presents major technical and economic parameters of optimal variants of the plant for synthesis of methanol on the basis of coal and gas that were obtained from optimization studies on mathematical models of the plants.

III. PROCESS FLOWS OF ELECTRICITY SUPPLY TO REMOTE CONSUMERS, ON THE BASIS OF ENERGY OF NATURAL GAS AND COAL

The considered plants for methanol synthesis were included in the process flows of electricity supply to remote consumers, on the basis of energy of natural gas and coal (brown coal) of large deposits.

The following process flows of energy production and transportation were compared (Fig.2):

1. Natural gas production, 1420 mm gas pipeline, electricity production by gas combined -cycle plants (GP 1420).
2. Natural gas production, methanol

production at PCME, methanol transportation by the 1220 mm pipeline, electricity production from methanol at combined cycle plant (PCMEg+ PL 1120).

3. Coal production, methanol production at PCME, methanol transportation by the 1220 mm pipeline, methanol-based electricity production at combined cycle plant (PCMEc+PL1220).

4. Coal production, railway transportation of coal from production site to consumers, coal-based electricity production by environmentally friendly thermal power plants (RWc +TPPc)

5. Coal production, electricity production from coal on production site by environmentally friendly TPPs, electricity transportation to consumers along DC transmission lines (TPPc+DCTL)

6. Natural gas production, electricity production from gas on production site by environmentally friendly TPPs, electricity transportation to consumers along DC transmission lines (TPPg+DCTL).

TABLE I

MAIN TECHNICAL AND ECONOMIC PARAMETERS OF OPTIMAL VARIANTS OF PCME

Parameter, unit	PCME variants	
	on gas	on coal
Annual consumption of natural fuel, million m ³ , thousand t	2200	4500
Annual consumption of reference fuel, thousand tce	2500	2500
Annual methanol production: - in reference fuel, thousand tce - in natural fuel, thousand t	1400 1900	1350 1880
Capacity, MW: - steam turbine - gas turbine Auxiliary power Useful power	330 160 167 320	270 145 185 225
Annual electricity output, million kWh	2200	1560
Exergy efficiency, %	66,8	61,7
Capital investments in the plant, million USD	720	990
SLF price (IRR=15%), USD/tce	192	220

The economic efficiency of the indicated process flows is compared by the criterion of minimum electricity cost for consumers (at the

given profitability level). A generalized statement of the optimization problem has the form

$$\min_{C_{el}, C_t, IRR_z} C_{el}(K^{TPP}, K^{PCME}, K^{tr}, U^{TPP}, U^{PCME}, U^{tr}, C_t)$$

subject to

$$H(x, y, s) = 0,$$

$$G(x, y, s) \geq 0,$$

$$IRR(K^{TPP}, K^{PCME}, K^{tr}, U^{TPP}, U^{PCME}, U^{tr}, C_t) = IRR_z,$$

where C_{el} – electricity price at the process flow outlet; C_t – natural gas or coal price; x – a vector of independent variables of energy transport system; y – a vector of calculated parameters; s – a vector of initial technical and economic data; IRR_z – a set value of internal rate of return; H – a vector function of equality constraints; G – a vector function of inequality constraints; K^{TPP} – capital investments in electricity production; K^{PCME} – capital investment in conversion; K^{tr} – capital investment in transport; U^{TPP} – costs for electricity production; U^{PCME} – costs for conversion; U^{tr} – costs for transport depending on electricity supply variant.

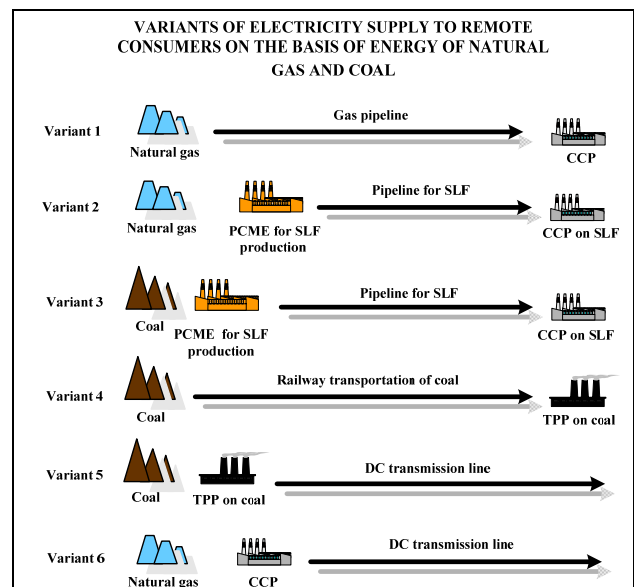


Fig. 2.

The considered variants are characterized by the following features.

Environmentally clean TPPs with the net efficiency 45 % are used for electricity production from coal, combined-cycle plants with the net efficiency 52% are taken for electricity production from natural gas [5]. Natural gas and coal are converted into methanol at PCMEs. Electricity from methanol is produced at combined-cycle plants on methanol with the efficiency 55%. Natural gas is transported by the 1420 mm pipeline. The 1220 mm pipeline was suggested for methanol transport over long distances. Unit costs for methanol transport by the 1220 mm pipeline and natural gas transport by the 1420 mm pipeline were obtained by optimization calculations at the previous stages and amount to \$10/tce per thousand km for methanol and \$28/thousand m³ per thousand km for gas pipelines [2-4]. Unit costs for railway coal transport are taken in accordance with the tariff directory of JSC “RZhD” [6]. They make up \$7.6 – 9.5/t per thousand km. The price of coal in situ is taken equal to \$30/tce, that of gas – \$50/thousand m³. The ±500 kV single circuit transmission lines with a rated capacity of 3000 MW were designed for DC transmission. Unit costs for electricity transmission by DC lines were also obtained at the previous stages of studies and make up 1 cent/kWh per thousand km. The main initial data applied in calculations are presented in Tables 2-4. The data concerning a plant for co-production of methanol and electricity are taken based on Table 1.

The results of comparing the economic efficiency of the mentioned process flows by the criterion of minimum electricity cost for consumers are given in Fig. 3.

Note that the 1220 mm methanol pipelines allow pumping of about 100 million tce. Such amount of fuel can produce some 400 billion kWh of electricity. Electricity transmission by the ±500 kV DC transmission lines of a rated capacity of 3000 MW allows delivery of about 20 billion kWh to consumers annually.

TABLE 2

ASSUMED TECHNICAL AND ECONOMIC CHARACTERISTICS OF DC TRANSMISSION LINE

Parameter, unit	
Specific investment in overhead TL, thousand doll./km	230
Specific investment in converter substation, doll./kW	85
Energy losses at converter substations, %	2
Total section of wires with the same pole, mm ²	2800
Annual energy losses in overhead line at rated output power and number of utilization hours, % /thousand km	3.75
Rated output power, MW	3000
Capacity utilization per year, h	6000
Capital investment in infrastructure, million doll.	80
Operating costs, % of investment	
— overhead line	0.8
— converter substation	2.0
Depreciation charges, % of investment	6

TABLE 3

ASSUMED INDICES OF GAS (GP) AND METHANOL (MP) PIPELINES

Index, unit	GP	MP
Rated pressure, MPa	7.4	5.4
Rated capacity utilization per year, h	8000	8000
Volume of pumped medium, gas – billion m ³ , methanol – million tce	36	100
Base unit cost of linear part, million doll./km	2.7	1.63
Fixed component of investment in pumping station, million doll.	25	15
Variable component of investment in pumping station, doll./kW	400	700
Specific fuel consumption by gas driven turbine at compressor stations of pipelines, gce/kWh	384	-
Electricity price of electric drive of pumping stations at methanol pipelines, cent/kWh	-	5
Rated low calorific value of natural gas or methanol, MJ/nm ³ , MJ/kg	33.5	21.1
Operating costs, % of investment	3.5	3.5
Depreciation charges, % of investment	6	6
Cost of pumping, gas – doll./m ³ , methanol – doll./tce	28	10

TABLE 4
ASSUMED TECHNICAL AND ECONOMIC INDICES
OF TPPS

Index	CCP on SLF	CCP on gas	TPP on coal
Specific investment per unit of useful power, doll./kW	700	700	1400
Specific consumption of equivalent fuel (net), tce/kWh	223	236	275
Conditionally fixed costs, % of investment	3 – 4	3 – 4	4 – 5
Depreciation charges, % of investment	4 – 6	4 – 6	5 – 7
Installed capacity utilization, h	6000	6000	6000

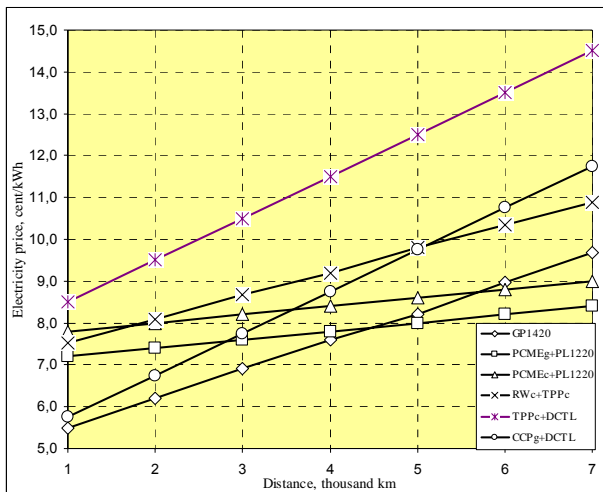


Fig. 2. Results of comparing the efficiency of variants for electricity supply to remote consumers

IV. CONCLUSIONS

Fig. 3 shows that transportation of natural gas by the 1420 mm pipeline is economically efficient over distances to 4.5 thousand km. For larger distances it is rational to use a PCME for natural gas conversion into SLF and transport it by a pipeline. Transport of (brown) coal by railway is reasonable over distances to about 1.7 thousand km. For larger distances it is advisable to transport SLF produced from coal by pipelines. Note that the tariff for coal transport by railway that is applied in calculations is accepted based on the current tariff policy of JSC "RZhd". The tariffs formed do not take into account capital investment in construction of new railways. It

is expected that considerable volumes of coal transported can lead to limitation of capacity of operating railways and the necessity will arise to construct new branches. As a result the tariffs for coal transport will rise sizably.

Electricity transmission by DC transmission lines that is produced from brown coal or natural gas can not compete with distant piped large-scale transport of liquid and gaseous fuel.

Hence, it can be asserted with a high degree of validity that the process flows based on PCME for conversion of solid and gaseous fuel into SLF with its further piped transportation over large distances are most efficient as compared to other methods of distant transportation of energy of these fuel kinds.

VI. REFERENCES


- [1] Kler A.M., Tyrina E.A. Mathematical modeling and technical and economic studies on plants for coproduction of methanol and electricity for methanol synthesis. Novosibirsk: Nauka . Sib. predpriyatiye RAN, 1998. (In Russian)
- [2] Kler A.M., Saneev B.G., Sokolov A.D., Tyrina E.A. Assessment of the efficiency of different technologies for distant energy transportation. Izv. RAN. Energetika. 2000. No. 2. P. 36-43. (In Russian)
- [3] Alexander M. Kler, Boris G. Saneev, Alexander D. Sokolov et al. Long-distance transport of energy carriers from the eastern regions of Russia to Northeast Asia countries. Perspektivy energetiki, 2002. Volume 6. P. 53-60.
- [4] Kler A.M., Tyurina E.A. Long-distance energy transport to NEA countries: assessment of the efficiency of using methanol and dimethyl ether as energy carriers. Perspektivy energetiki, 2005. Volume 9. P.69-78. (in Russian)
- [5] Tariff Directory No.1 RZhd – Price list No. 10-03. Approved by Resolution of the RF FEC No.47-t/5 of 17.06.03. (in Russian)
- [6] Favorsky O.N., Polishchuk V.L., Livshits I.M., Dlugoselsky V.I. The world experience and prospects for introduction of combined-cycle and gas turbine technologies in heat and power engineering of Russia in the context of capabilities of domestic machine building. Teploenergetika. 2007. No. P. 46-51. (in Russian).

VI. BIOGRAPHIES



Alexandr M. Kler graduated from Irkutsk Polytechnic Institute in 1971 with heat power station specialty. He is Doctor of Technical Sciences (1993), Professor (1999). At present he works as a Head of department of Energy Systems Institute SB RAS. Alexandr M.

Kler is a famous scientist in the area of the methods for mathematical modeling and optimization of parameters and flow charts of different thermal power and energy – technology plants, methods for optimization of thermal power plants operation conditions. He is the author and co-author of more than 180 scientific papers and books.



Elina A. Tyurina graduated from Irkutsk Polytechnic Institute in 1984 with automatic systems of management specialty. She is Doctor of Technical Sciences (2004). At present

she works as a Principal Researcher of Energy Systems Institute SB RAS. Her main fields of scientific interests are: mathematical modeling and optimization of energy-technology installations for the SLF synthesis and electricity production, estimation of efficiency of different technologies for energy resources conversion and long-distance transport of energy of natural gas and coal. She is the author and co-author of 80 scientific papers and books.



Olga V. Skripchenko graduated from Irkutsk Polytechnic Institute in 1971 with heat power station specialty. At present he works as a Senior Engineer of Energy Systems Institute SB RAS. She is the author and co-author of 15 scientific

papers and books.